


# PRECONTRAININT 602 BLOCKOUT




**Prati**  
*Selection*

**Serge Ferrari**

PRECONTRAINIT 602 BLOCKOUT  
COD 6286

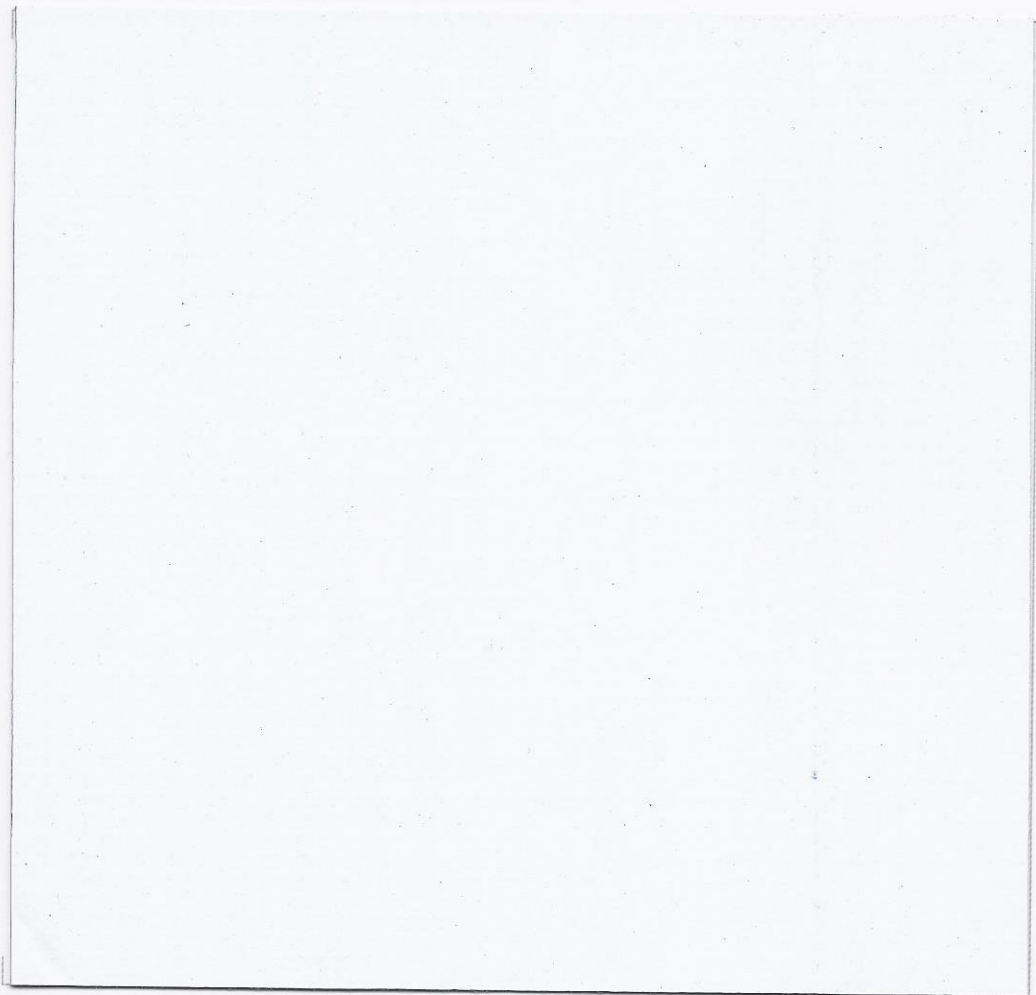

8503 BIANCO

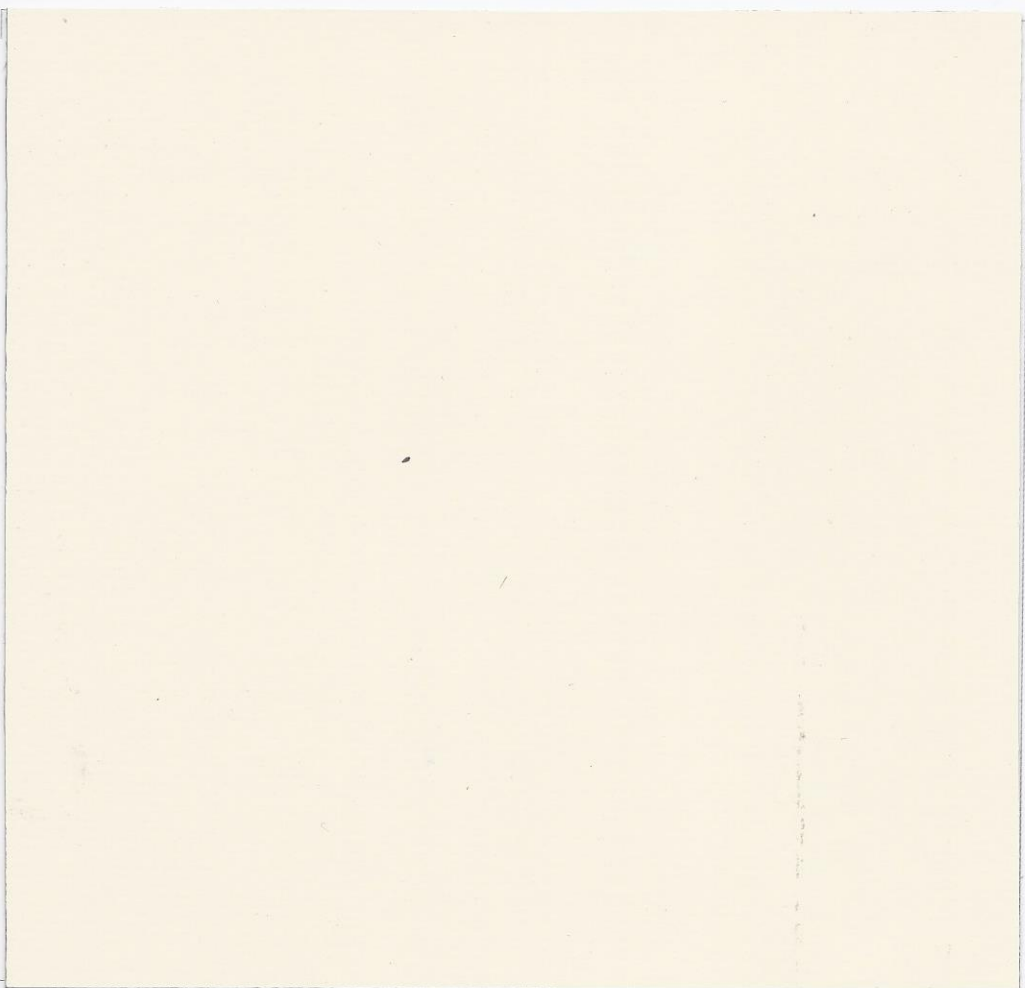

50020 VANIGLIA

# PRECONTRAINTE 602 BLOCKOUT

COD 6286

	IT	EN	DE	FR		IT	EN	DE	FR
<b>Filato / Yarn / Garn / Fil</b>	ordito: poliestere 1100 Dtex trama: poliestere 1100 Dtex	warp: polyester 1100 Dtex weft: polyester 1100 Dtex	Kette: Polyester 1100 Dtex Schuss: Polyester 1100 Dtex	chaîne: polyester 1100 Dtex trame: polyester 1100 Dtex	<b>Resistenza allo strappo / Tear strength / Weiterreißfestigkeit / Résistance à la déchirure (DIN 53363)</b>	ordito: ca 20 DaN trama: ca 20 DaN	warp: ca 20 DaN weft: ca 20 DaN	Kette: ca 20 DaN Schuss: ca 20 DaN	chaîne: ca 20 DaN trame: ca 20 DaN
<b>Spalmatura / Coating / Beschichtung / Enduction</b>	PVC	PVC	PVC	PVC	<b>Resistenza alla luce / Light fastness / Lichtechtheit / Tenne à la lumière (XENON TEST ISO 105-B02)</b>	livello 8/8	level 8/8	Niveau 8/8	niveau 8/8
<b>Costruzione / Construction / Einstellung / Contexture</b>	ordito: 8 fil/cm trama: 8 fil/cm	warp: 8 yarns/cm weft: 8 yarns/cm	Kette: 8 Fäden/cm Schuss: 8 Fäden/cm	chaîne: 8 fils/cm trame: 8 fils/cm	<b>Resistenza alle temperature / Resistance to temperatures / Temperaturbeständigkeit / Résistance à la température /</b>	+70°C / -30°C	+70°C / -30°C	+70°C / -30°C	+70°C / -30°C
<b>Spessore / Thickness / Stärke / Epaisseur</b>	0,62 mm	0,62 mm	0,62 mm	0,62 mm	<b>Aderenza / Adhesion / Haftung / Adhärence (EN ISO 2411)</b>	ca 9 DaN/5 cm	ca 9 DaN/5 cm	ca 9 DaN/5 cm	ca 9 DaN/5 cm
<b>Peso tessuto / Weight / Gewicht / Poids (EN ISO 2286-2)</b>	ca 750 g/m <sup>2</sup>	ca 750 g/m <sup>2</sup>	ca 750 g/m <sup>2</sup>	ca 750 g/m <sup>2</sup>	<b>Disponibilità / Availability / Verfügbarkeit / Disponibilité sur stock /</b>	standard	on stock	auf Lager	en stock
<b>Ignifugazione / Flammability / Entflammbarkeit / Ignitfugation /</b>	CL2 secondo le norme italiane RF 1/75 e 3/77	M2 BS 7837 NFP 92-507	B1 DIN 4102-1	M2 UNE 23.727 90	<b>Altezza del tessuto / Roll width / Breite / Laize</b>	267 cm	267 cm	267 cm	267 cm
<b>Finissaggio / Finishing / Schlusslack / Finition</b>	laccato lucido sui 2 lati impermeabile	Both side high-glossy lacquered water proof	beidseitig hochglänzend wasserdicht	Lacqué brillant biface impermeable	<b>Lunghezza rotolo / Roll length / Rollenlänge / Longueur de la pièce</b>	ca 50 m ca 300 m	ca 50 m ca 300 m	ca 50 m ca 300 m	ca 50 m ca 300 m
<b>Resistenza alla trazione / Breaking strength / Reisskraft / Résistance à la traction / (EN ISO 1421)</b>	ordito: ca 230 DaN/5 cm trama: ca 220 DaN/5 cm	warp: ca 230 DaN/5 cm weft: ca 220 DaN/5 cm	Kette: ca 230 DaN/5 cm Schuss: ca 220 DaN/5 cm	chaîne: ca 230 DaN/5 cm trame: ca 220 DaN/5 cm					

## 2013/2016 COLLECTION

I dati tecnici possono subire variazioni a seconda dei lotti di produzione e sono soggetti a tolleranza di ±5%  
The a. m. technical data can vary according to production lots and are subject to a +/- 5% tolerance

Die technischen Daten sind mittlere Werte mit einer Toleranz von +/- 5%

Les données techniques peuvent varier selon le lot de fabrication et sont sujettes à une tolérance de ±5%